


Profi Liner Open Box

Type: SDP 27 eLCVB3-RC



Profi Liner 3 - Roll Over Curtainsider

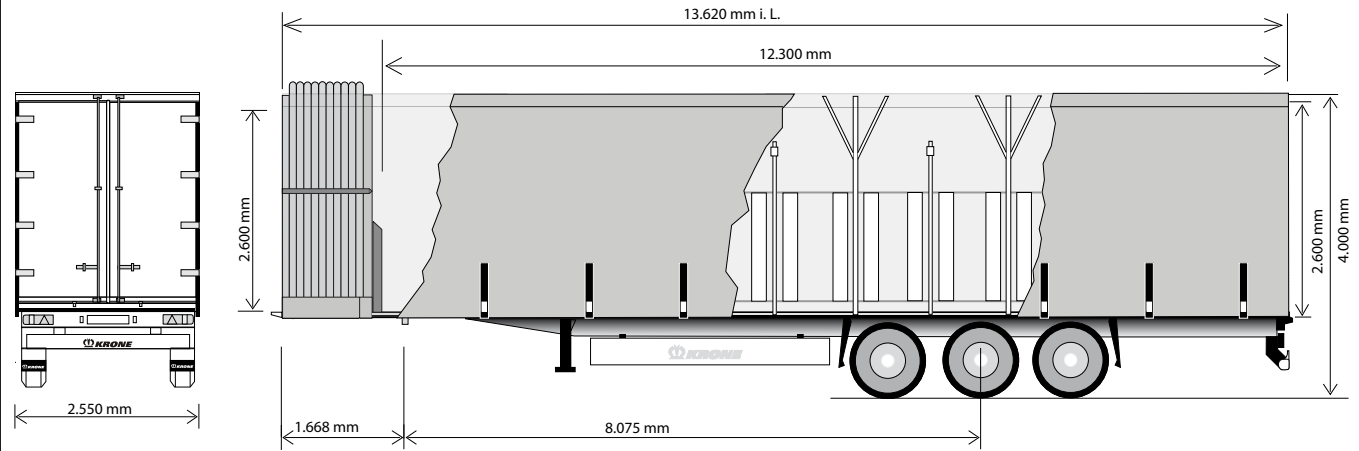

Technical data:

Type:	SDP 27 eLCVB3-RC
King pin load:	12 000 kg
Axle load (technically possible):	27 000 kg
Perm. total weight (technically possible):	39 000 kg
Tare weight:	ca. 7.130 kg
Payload (technically possible):	ca. 31.870 kg
Axle spread:	1 310 / 1 310 mm
Neck height:	125 mm
5th wheel height:	1 150 mm
Clear length:	13 620 mm
Clear length: (with open body work):	12 300 mm
Clear width:	2 480 mm
Clear height (with closed body work):	2 600 mm

(Dimensions and weights for standard units)

Internal view:



Bodywork open

Technical description:

13 pairs of lashing rings in outer frame	roof construction roof construction designed for 11 cross members on movable supports, connected with vertical alloy panels, alloy panels movable to in- or outside,
Container lockings supporting container types: 1x 40' and 2x 20'	
3 Stanchions for Libner body work, netto length 1065 mm	
2 mechanically operated landing legs, 2 x 12 tonnes capacity, half round compensating feet	Plywood front wall with bolted corner posts, lateral restricted through loading, tension belt for fixing the open body work in front position
Low-maintenance axles with disc brakes; Disc brakes 430 mm; raise/lower device (1 valve); Rims centre nave	Plywood front wall with bolted corner posts, lateral restricted through loading, tension belt for arrest the open body work in front position
Tyres: 6 x 385/65 R 22.5, brand: Krone choice	
Without spare wheel carrier	Plywood container rear doors including steel portal frame, double door locks for container rear door
EC braking system including vehicle stabilising system; low-maintenance automatic; spring-loaded hand brake; 2S/2M EBS system, 2 sensors on each axle with RSS, diagnostics on ISO 7638 socket (EBS)	without sideposts
24 volts lighting system with 2 x 7-pole socket DIN ISO 1185/3731; front and rear marker lights; with two multi-function rear lights acc. to EC incl. rear fog light and reversing lights; 2 large contour lights with rubber arm; side marker lights in LED	Delta steel buffers at rear
Stanchion depot, for Stanchions of Libner body work	PVC curtain for RolloverCurtainsider-construction, with full lengths reinforcements, bottom with tensioners, materialquality 850 gr./m ²
30 mm thick, phenolic coated plywood floor, cut surfaces fully waterproofed and sealed. Strength acc.to DIN 283; for floor loadings up to 7.000 kg stacker-truck axle load	Steel parts shot blasted, with KTL primer and high-quality surface coating (standard painting single-colour); axles incl. wheel hubs painted black; underrun protection and light panel powder coated white for safety reasons; wheels silver with high-quality paint finish; accessories black or galvanized; reflective outline marking according to ECE-R48

Subject to modifications!
VF/Beu issue 06/2011

